



TASHEEL ROUNDABOUT, AL SAJAA INDUSTRIAL AREA, SHARJAH -UAE

+971566299377 | +971522297071

Web : www.perolini.co Email : sales@perolini.co

INDIA

MAHENDRANAGAR CHOKDI, RAMESHWAR COMPLEX, MORBI-363642. (GUJ), INDIA.

+919446379696 | +919495339877






EXCLUSIVE I INNOVATION

ABOUT US

Welcome to PEROLINI CERAMICS, where you can discover a selection of products and solutions to help you create an ideal living and enthralling work space. We started our journey since 1973. Today, we are a recognized name in the industry. It is our endeavor to deliver endless choice and enviable quality at endearing prices. We have developed an understanding of what customers want, through years of experience and we constantly strive to deliver it. Our customers are pampered with oodles of attention and spoilt for choice. This is because - Your satisfaction is our inspiration!

We leave no stone unturned as our premier products are manufactured with superior quality Ceramic raw materials ensuring ultimate tile strength, glaze and finishing. We are committed to supply the highest quality products and strive to surpass customer expectations. We understand the value of money and ensure that our customers feel completely content for what they spend at Perolini Ceramics in terms of cost and quality. We offer a host of constantly attempt to deliver products that keep up with the latest trends in the industry.

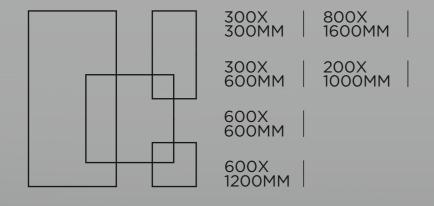







APPLICATIONS AREA



TECHNICAL SPECIFICATIONS







1004 - L



1004 - HL



1004 - FL








1005 - L



1005 - HL



1005 - FL

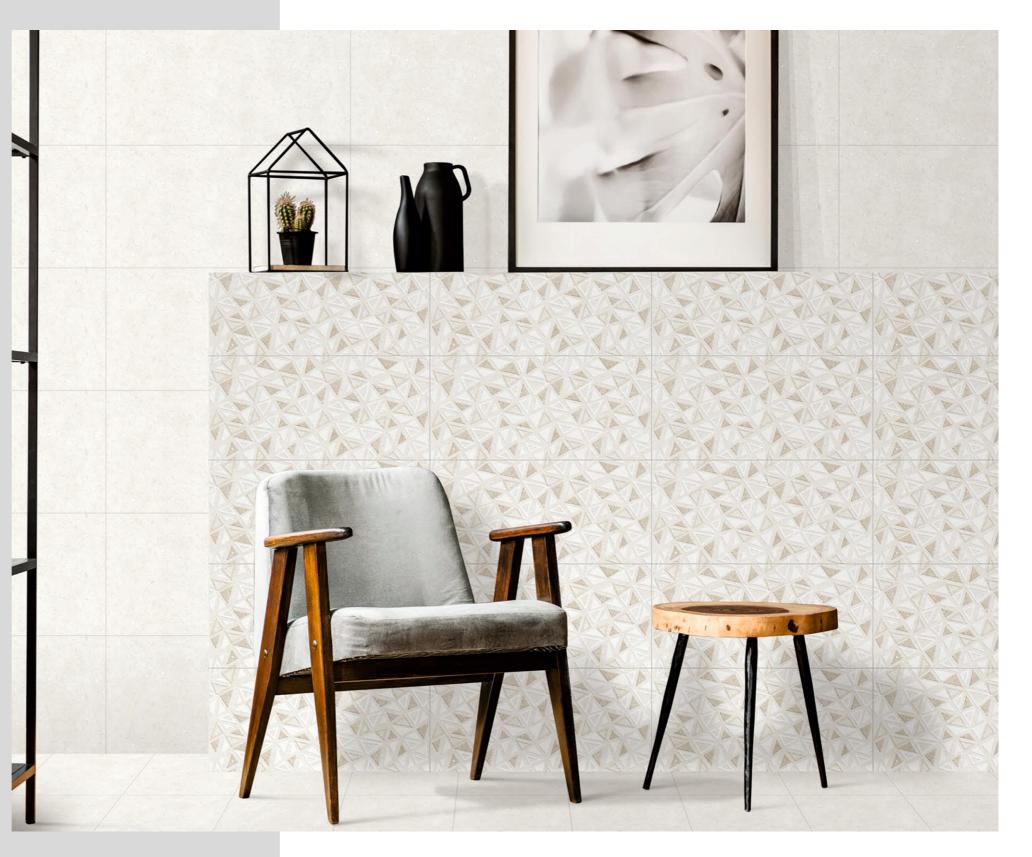





1006 - L



1006 - HL



1006 - FL



300X600MM 300X300MM





1007 - L



1007 - HL



1007 - FL








1008 - KT



1008 - HL-1



1008 - FL









1008 - L



1008 - HL-2



1008 - FL

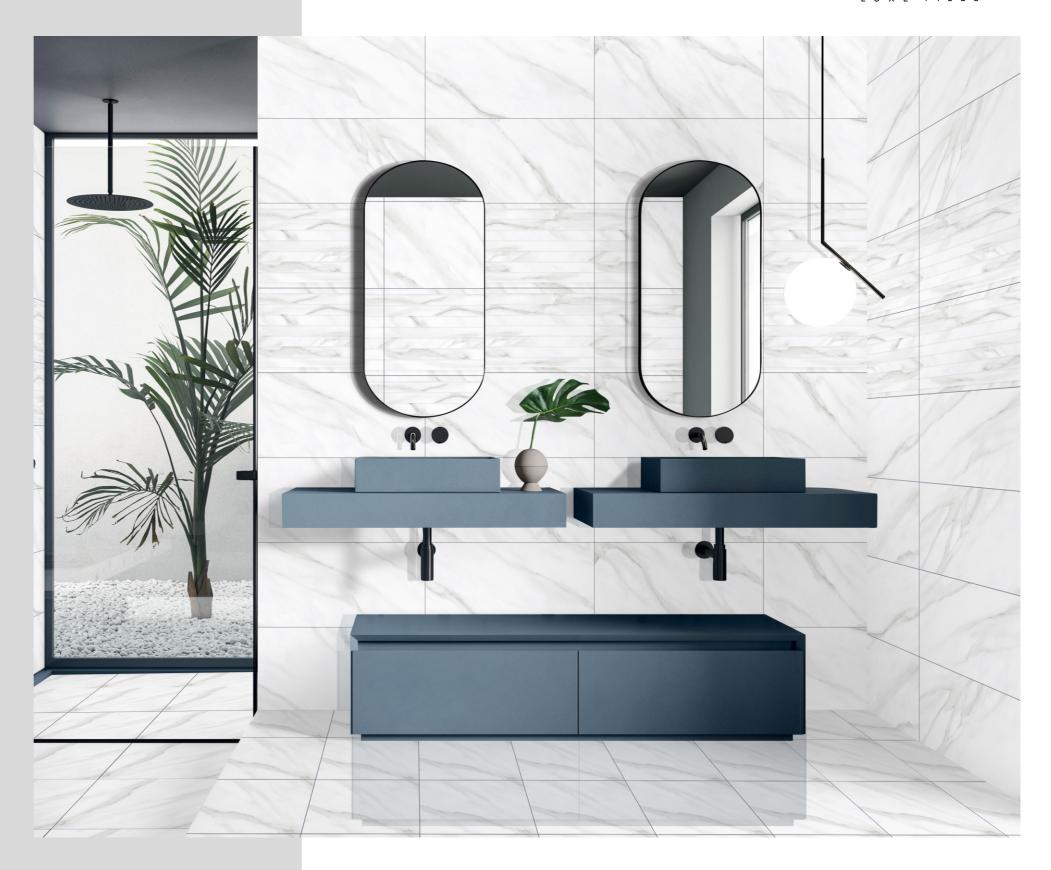


300X600MM 300X300MM





1011 - L

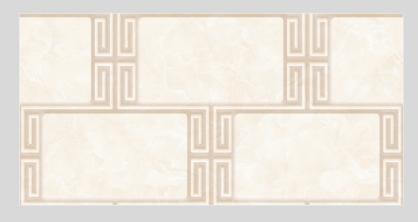

1011 - HL



1011 - FL




300X600MM 300X300MM






1012 - L

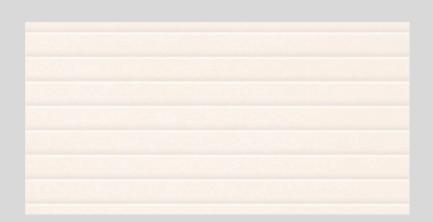

1012 - HL




1012 - FL

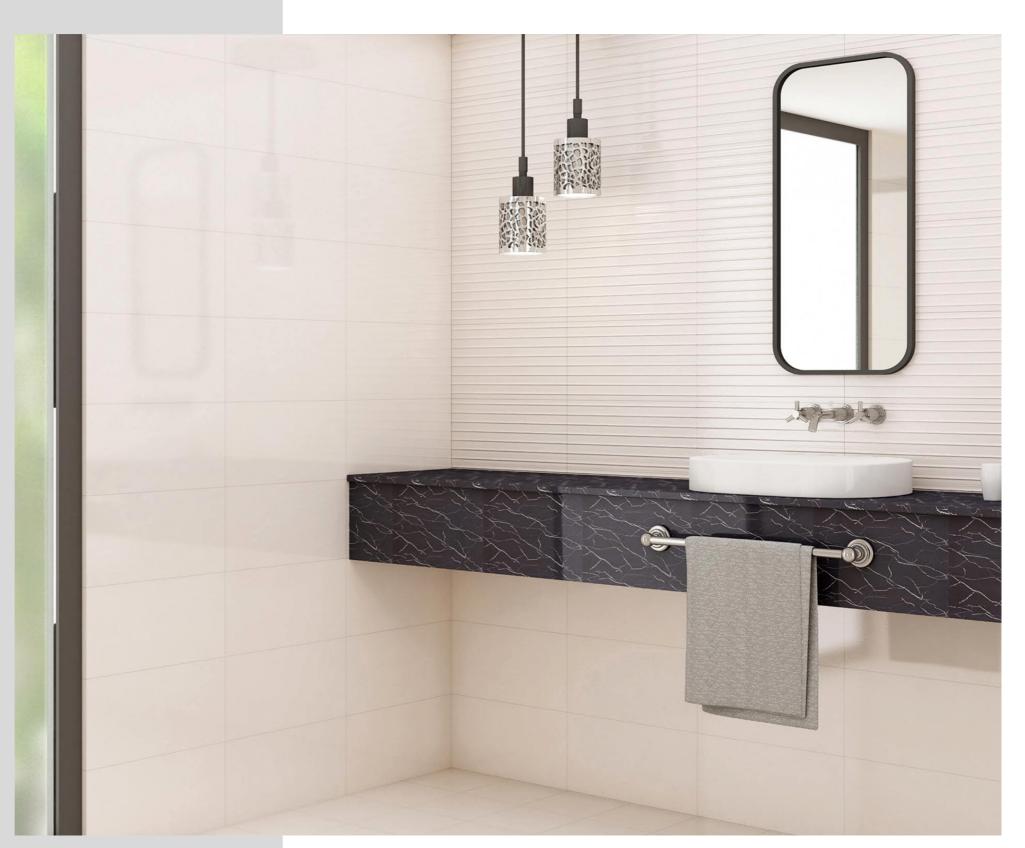






1014 - L

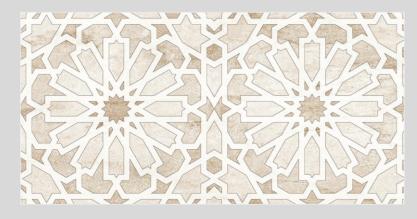

1014 - HL




1014 - FL

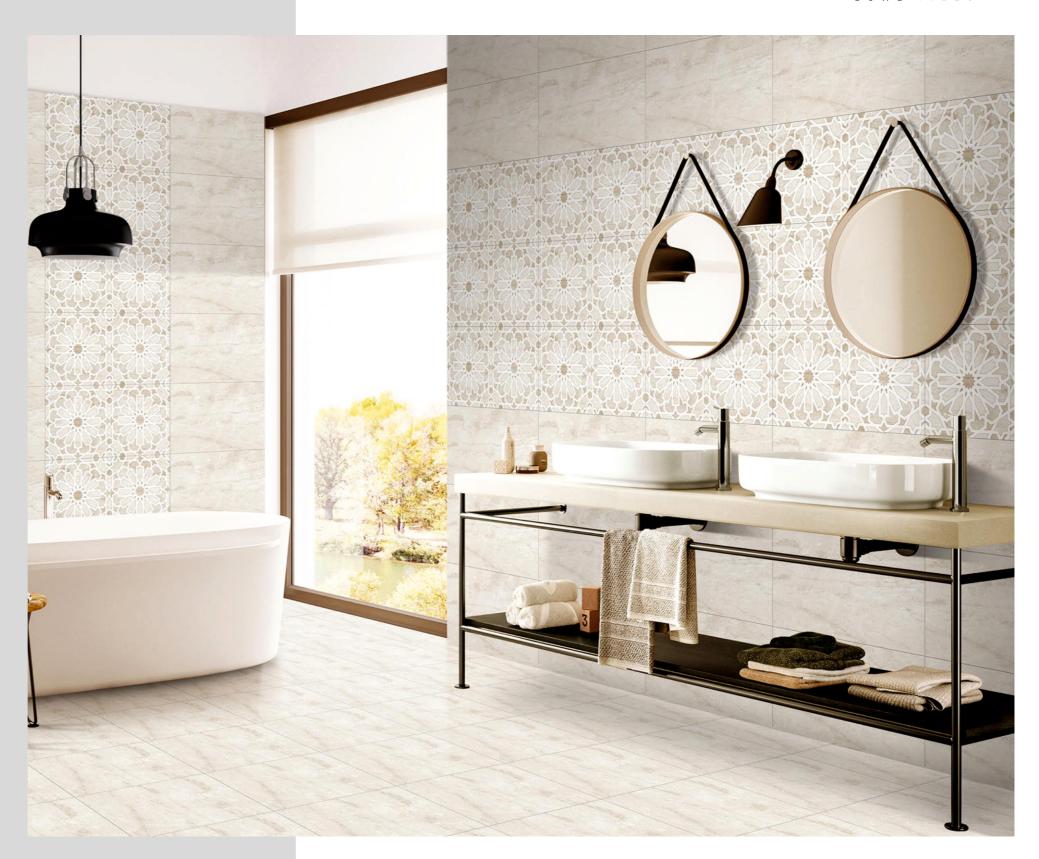





1018 - L

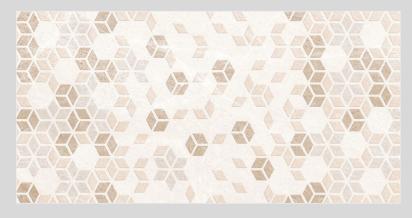

1018 - HL



1018 - FL




300X600MM 300X300MM





1049 - L

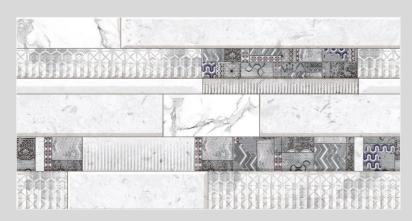

1049 - HL



1049 - FL




300X600MM 300X300MM FINISH GLOSSY





1127 - L

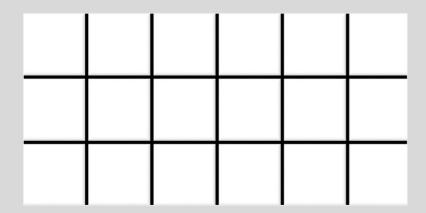

1127 - HL








C-1034 - L



C-1034 - HL



C-1034 - FL

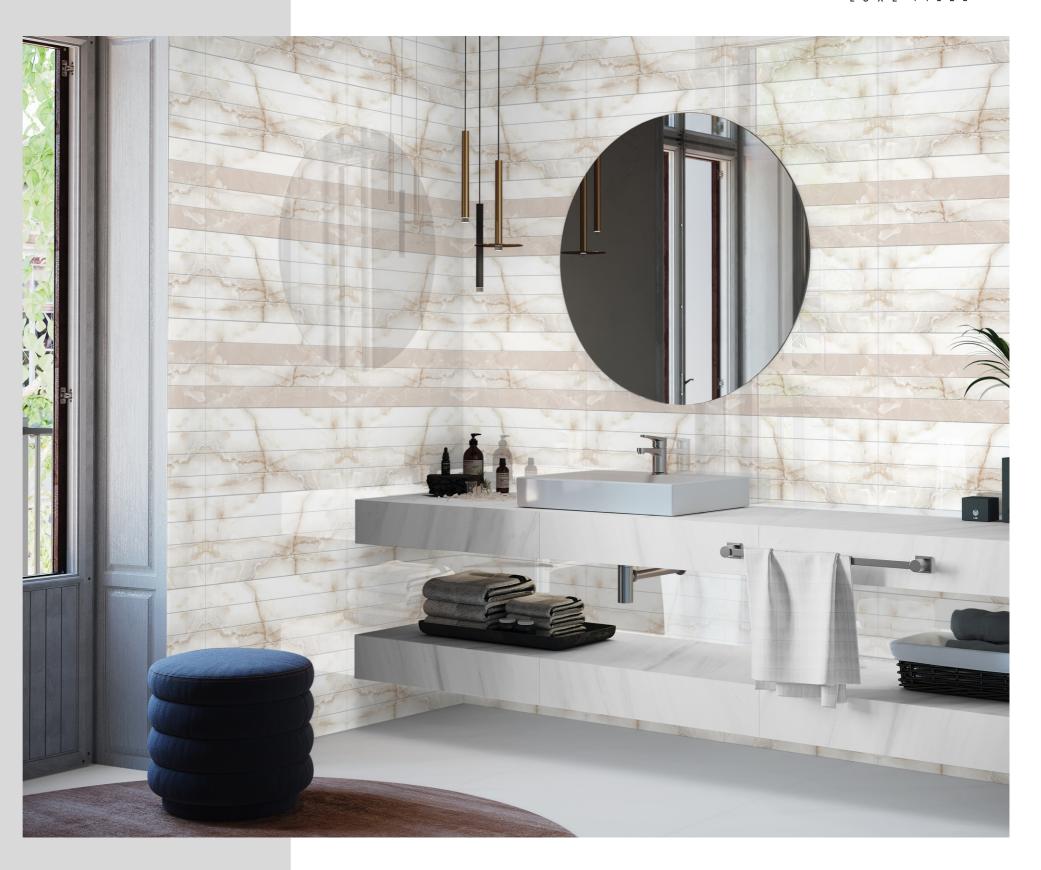

300X600MM 300X300MM







7507 - L



7507 - KT




7507 - FL

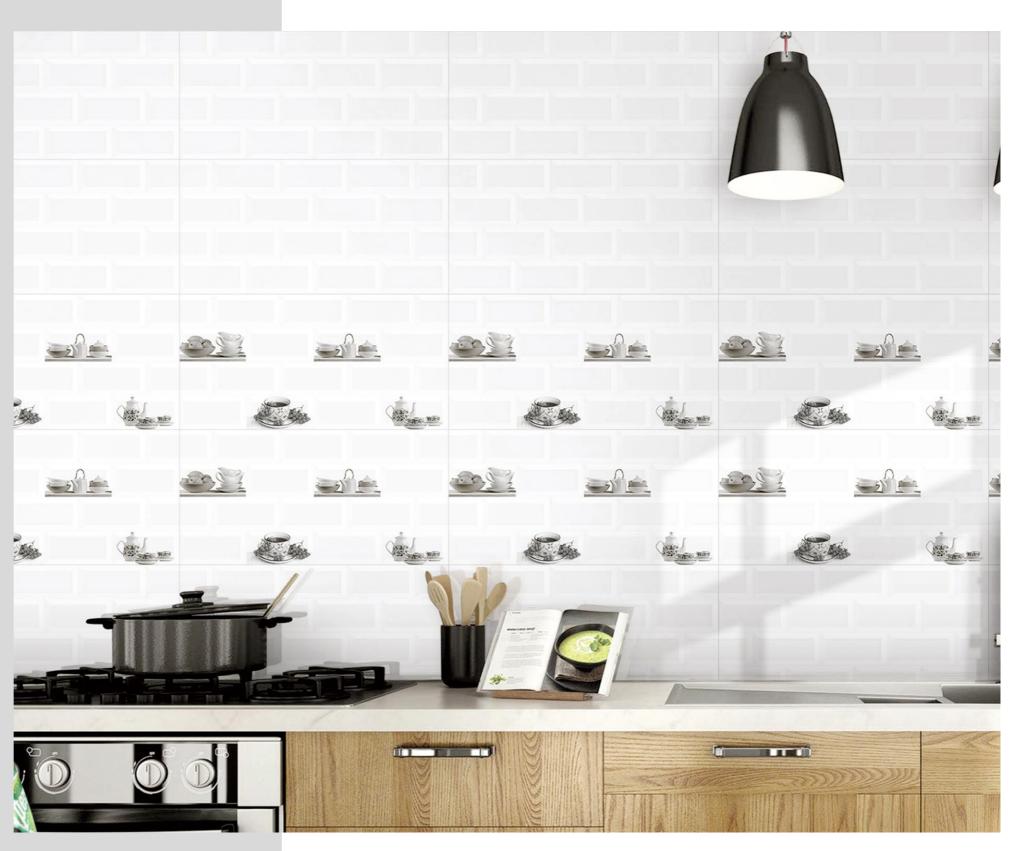


300X600MM 300X300MM

FINISH GLOSSY



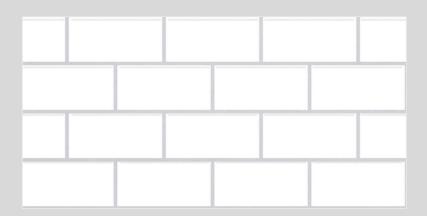


7550

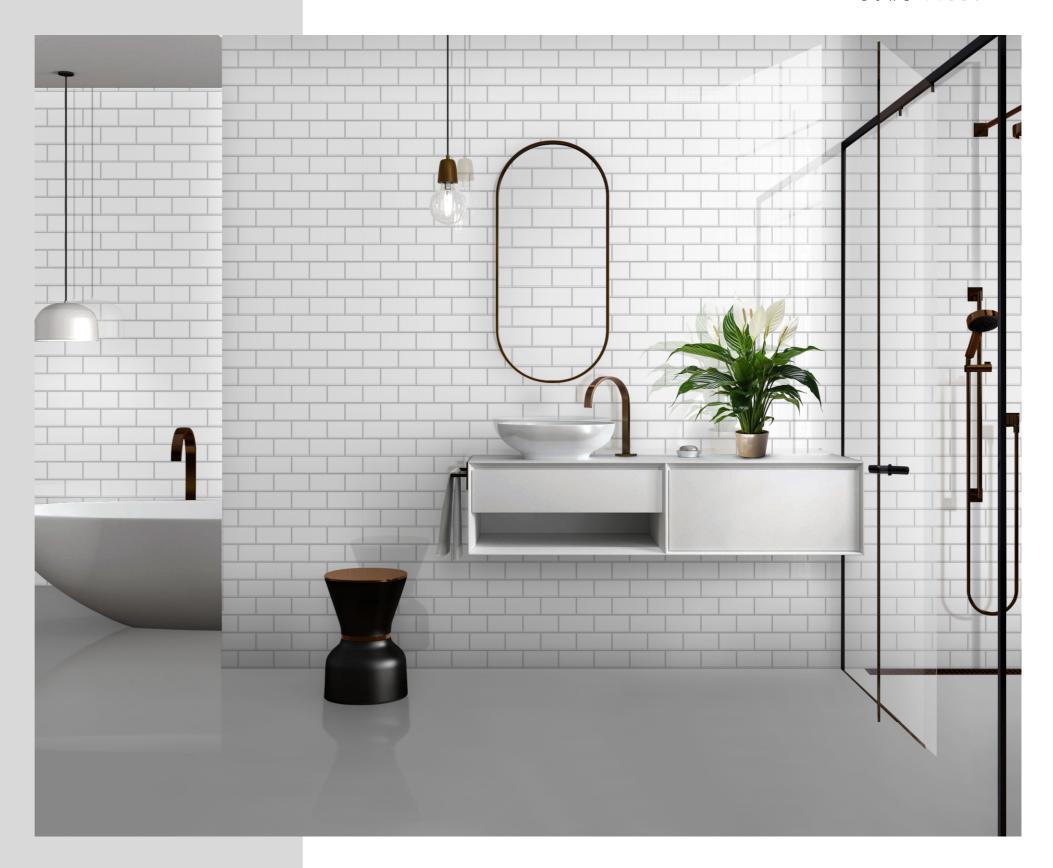

300X600MM 300X300MM



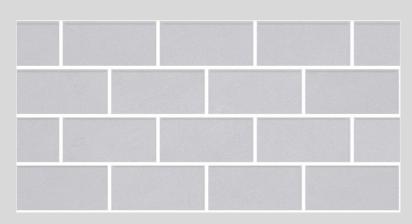

7560








7580







BLACK

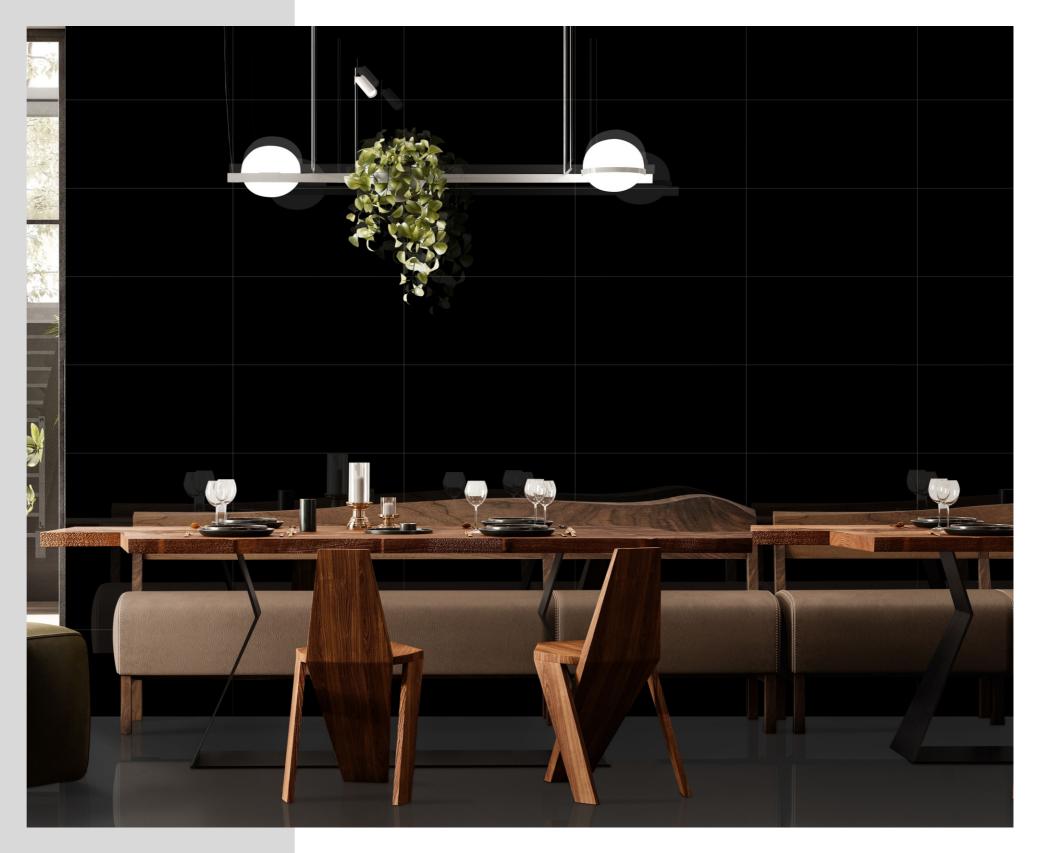

300X600MM 300X300MM FINISH GLOSSY



WHITE










4144 - L

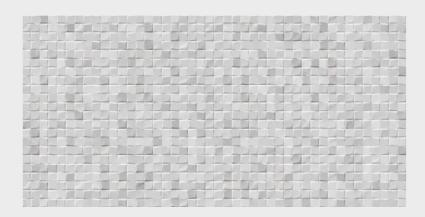

4144 - HL



4144 - FL




300X600MM 300X300MM






9024 - L

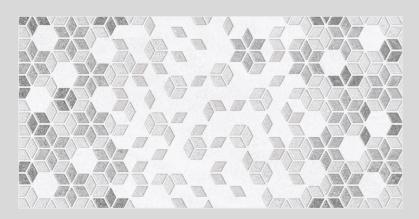

9024 - HL



9024 - FL

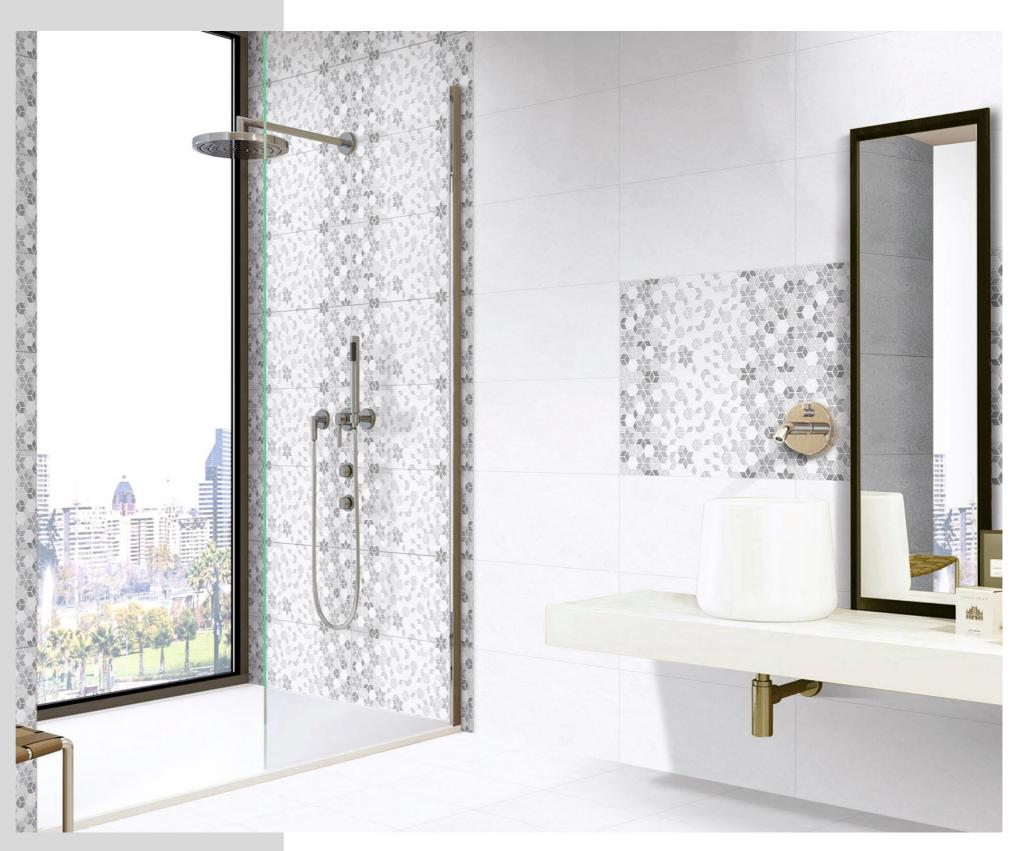






9025 - L



9025 - HL



9025 - FL



300X600MM 300X300MM






9027 - L



9027 - HL



9027 - FL

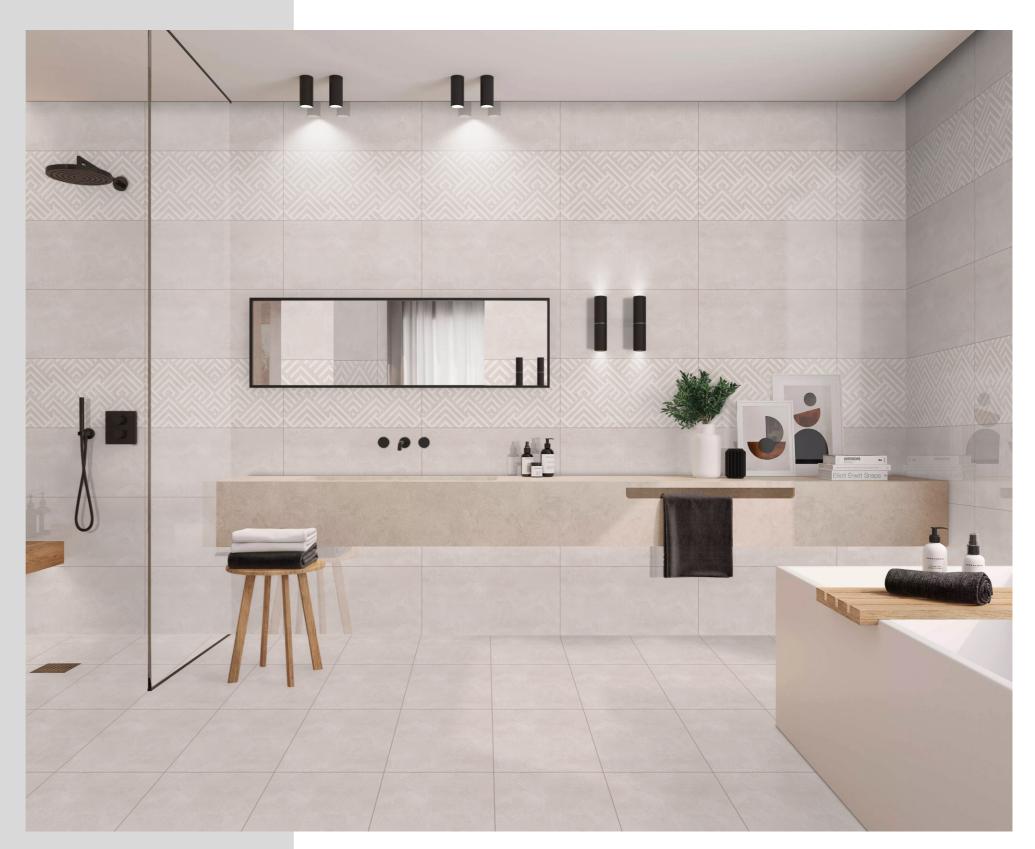


300X600MM 300X300MM





9028 - L

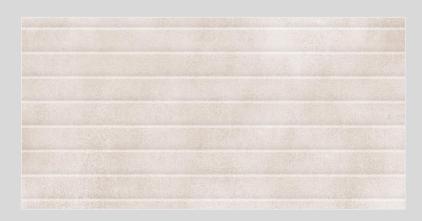

9028 - HL



9028 - FL




300X600MM 300X300MM





9219 - L

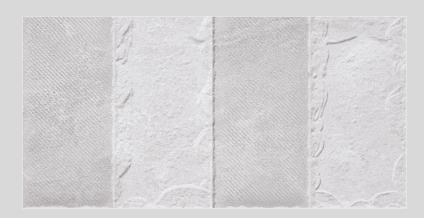

9219 - HL



9219 - FL







9245 - L



9245 - HL



9245 - D



300X600MM 300X300MM





9246 - L



9246 - HL



9246 - D







9247 - L



9247 - HL



9247 - FL



300X600MM 300X300MM





9390 - L



9390 - HL



9390 - FL








BLACK



300X600MM 300X300MM FINISH MATT



WHITE





300X600MM 300X300MM





9022 - L



9022 - HL



9022 - FL








EL - 5061








EL - 5062

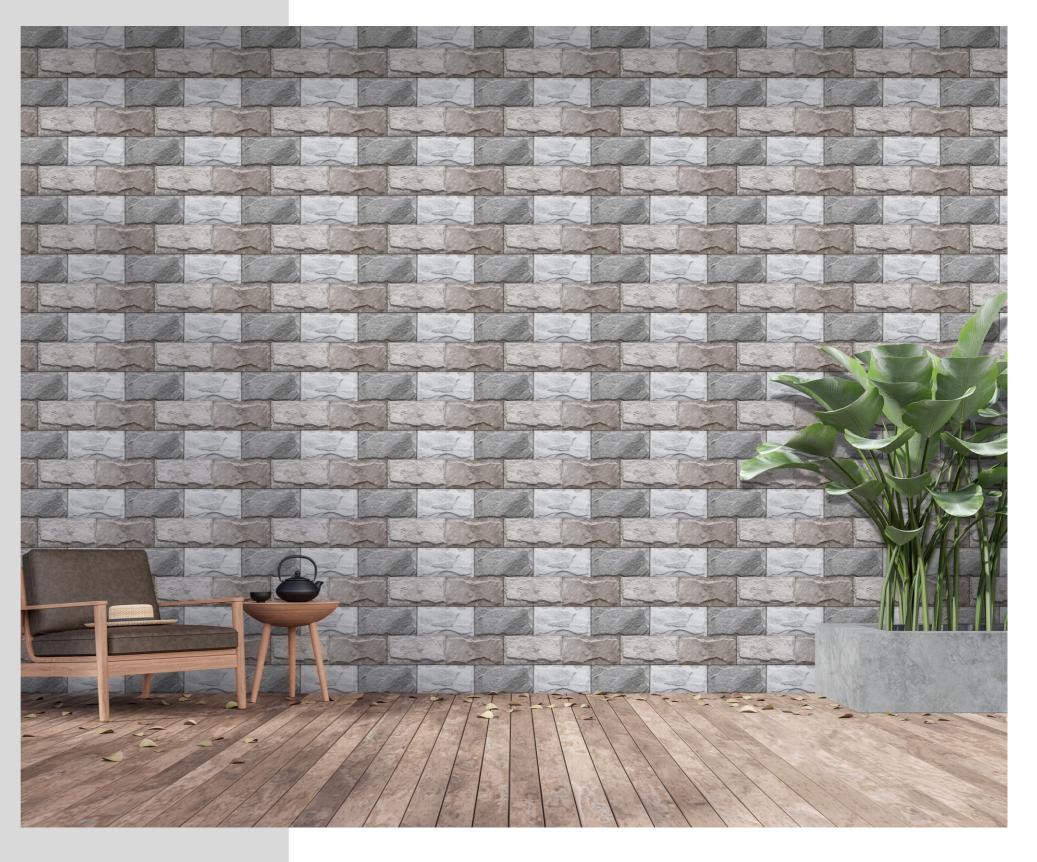





TECHNO 1009

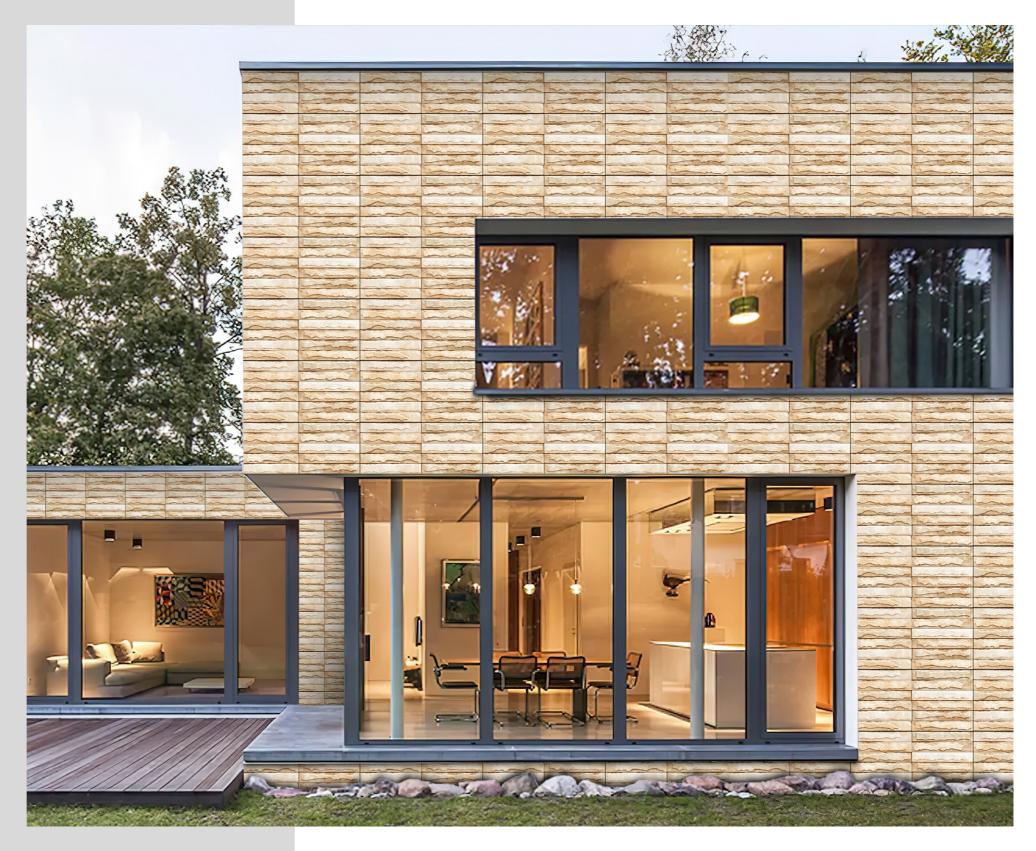



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/ EN14411 GROUP Bla	VITRIFIED TILES VALUE	TEST METHOD			
REGULATORY PROPERTIES						
 Deviation In Length & Width Deviation In Thickness Straightness Of Sides Rectangularity Surface Flatness Color Differences Glossiness 	±0.50% ±5.00% ±0.50% ±0.50% Unaltered As Per Manufacturer	±0.10% ±2.00% ±0.10% ±0.10% ±0.10% No Change Min. 70 %	ISO-10545-2 ISO-10545-2 ISO-10545-2 ISO-10545-2 ISO-10545-16 Glossometer			
STRUCTURAL PROPERTIES						
Water Absorption Apparent Density	≤0.50% >2.00 gm/cc	≤0.05% >2.28 gm/cc	ISO-10545-3 DIN 51082			
MASSIVE MECHANICAL PROPERTIES						
 Flexural Modulus Of Rupture Flexural Breaking Strength Impact Resistance 	Min. 35N/mm² Min. 1300 N As Per Manufacturer	Min. 40N/mm² Min. 2000 N Min. 0.55	ISO-10545-4 ISO-10545-4 ISO-10545-5			
SURFACE MECHANICAL PROPERTIES						
Deep Abrasion Resistance Moh's Hardness	Max. 175mm³ Min. 6	Max. 132mm³ 8*	ISO-10545-6 EN101			
THERMO HYGROMETRIC PROPERTIES						
 Frost Resistance Thermal Shock Resistance Moisture Expansion Thermal Expansion 	No Damage No Damage Nil Max 9.0x10 ⁻⁶	Frost Proof No Damage Nil Max 6.5x10 ⁻⁶	ISO-10545-12 ISO-10545-9 ISO-10545-10 ISO-10545-8			
CHEMICAL PROPERTIES						
1) Chemical Resistance 2) Stain Resistance	No Damage Resistant	No Damage Resistant	ISO-10545-13 ISO-10545-14			
SAFETY PROPERTIES						
1) Slip Resistance(friction Co Efficient)	>0.40	>0.40	ISO-10545-17			

PACKING DETAILS

Sr. No.	Size	Thickness (approx.)	Pieces / Box	Area/Box	Wt./Box (approx.)
1	600x1200mm	8.5 mm	2 pcs.	15.50 sq. ft.	28.5-29 kgs.
2	600x600mm	7.9 mm	4 pcs.	15.50 sq. ft.	26.5-27 kgs.